
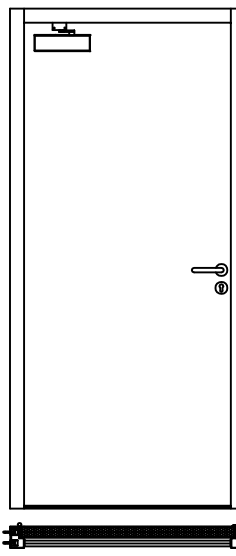


Overall Frame Width = Structural Opening Minus 10mm

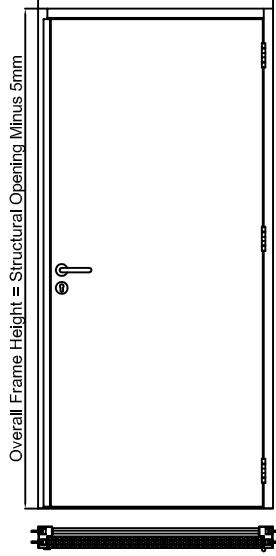

**Standard Specification:**

Frame Manufactured From 1.6mm Zintec Steel

Leaf Manufactured From 1.2mm Zintec Steel

90mm Deep Overall Standard Single Rebate Frame

45mm Thick Security Astragal Lipped Door Leaf

Security Dog Bolts To Hinged Side Of Leaf

Dufaylite or Rockwood Infill To Door Leaf

Hardware To Suit Customers Requirements, Door Closer Required On Any Unlatched Hardware Combinations

Minimum 3 No. Stainless Steel Ball Bearing Butt Hinges (Subject To Leaf Weight And Design Configuration)

Aluminium DDA Compliant Threshold c/w Neoprene Seal

Standard Self Adhesive Frame Weather Seals



Ppc Finish - Standard Stock RAL/BS Colour



Threshold Detail

DOVE STEEL DOORS AND SHUTTERS LIMITED  
 TEL: 01384 22 11 44  
 www.dovesteeldoors.co.uk  
 SD-FRSLX 4 HOUR FIRE RATED SINGLE LEAF STEEL DOORSET

Overall Frame Width = Structural Opening Minus 10mm

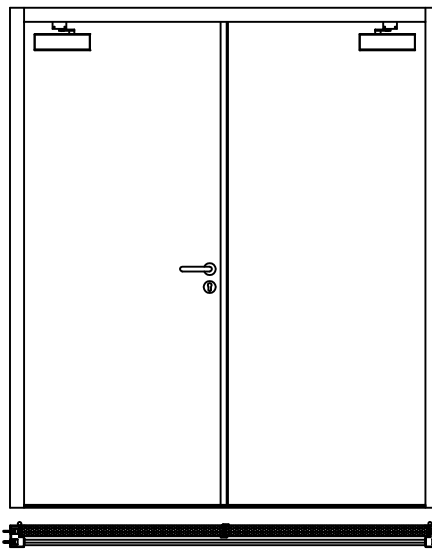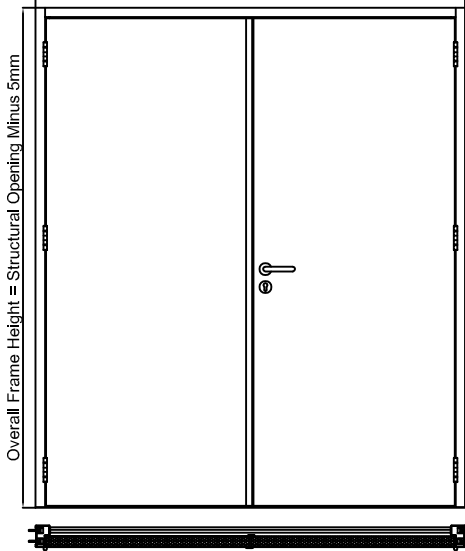

**Standard Specification:**

Frame Manufactured From 1.6mm Zintec Steel

Leaf Manufactured From 1.2mm Zintec Steel

90mm Deep Overall Standard Single Rebate Frame

45mm Thick Security Astragal Lipped Door Leaf

Security Dog Bolts To Hinged Side Of Leaf

Dufaylite or Rockwood Infill To Door Leaf

Hardware To Suit Customers Requirements, Door Closer Required On Any Unlatched Hardware Combinations

Minimum 3 No. Stainless Steel Ball Bearing Butt Hinges (Subject To Leaf Weight And Design Configuration)

Aluminium DDA Compliant Threshold c/w Neoprene Seal

Standard Self Adhesive Frame Weather Seals



Ppc Finish - Standard Stock RAL/BS Colour



Threshold Detail

DOVE STEEL DOORS AND SHUTTERS LIMITED  
 TEL: 01384 22 11 44  
 www.dovesteeldoors.co.uk  
 SD-FRSLX 4 HOUR FIRE RATED DOUBLE LEAF STEEL DOORSET

Overall Frame Width = Structural Opening Minus 10mm

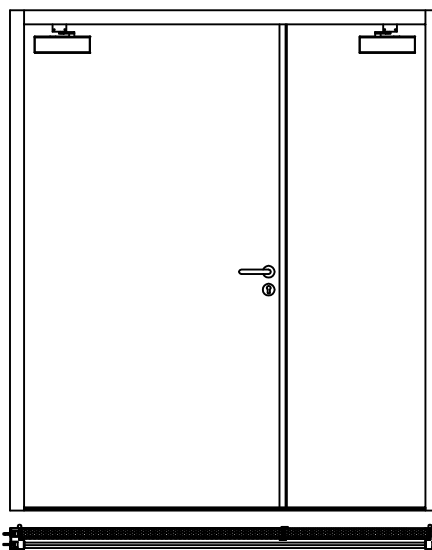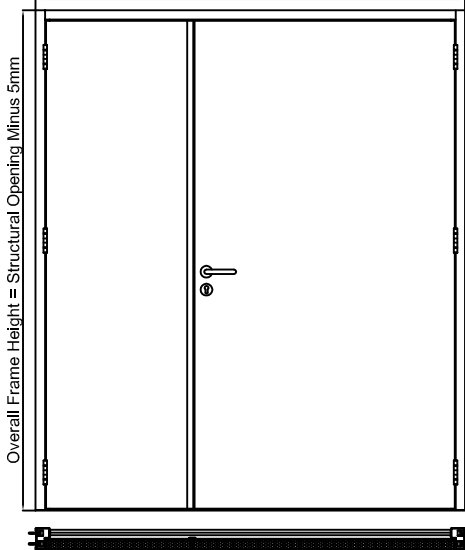

**Standard Specification:**

Frame Manufactured From 1.6mm Zintec Steel

Leaf Manufactured From 1.2mm Zintec Steel

90mm Deep Overall Standard Single Rebate Frame

45mm Thick Security Astragal Lipped Door Leaf

Security Dog Bolts To Hinged Side Of Leaf

Dufaylite or Rockwood Infill To Door Leaf

Hardware To Suit Customers Requirements, Door Closer Required On Any Unlatched Hardware Combinations

Minimum 3 No. Stainless Steel Ball Bearing Butt Hinges (Subject To Leaf Weight And Design Configuration)

Aluminium DDA Compliant Threshold c/w Neoprene Seal

Standard Self Adhesive Frame Weather Seals

Ppc Finish - Standard Stock RAL/BS Colour



Threshold Detail

DOVE STEEL DOORS AND SHUTTERS LIMITED  
 TEL: 01384 22 11 44  
 www.dovesteeldoors.co.uk  
 SD-FRSLX 4 HOUR FIRE RATED LEAF & HALF STEEL DOORSET